




TUBE WALL LIGHT
CEILING & WALL MOUNTED, 2006

2025 LOW VOLTAGE UPDATE
Satin Brass




OVERALL DIMENSIONS

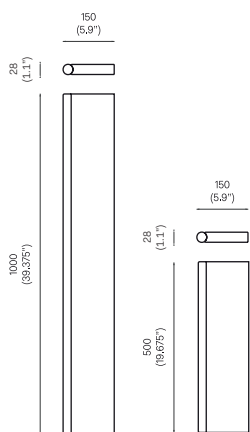


BACKPLATE DIMENSIONS

Mounting screws not included.



240V 120V

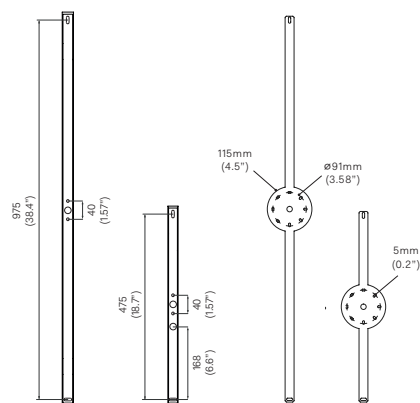

STANDARD MATERIAL/FINISH



CUSTOM FINISHES



LIGHT SOURCE SPECIFICATIONS

1000mm Tube Wall Light:
Integrated LED 13W / 1000mm Ø 28mm
1175lm / 2350K / 90+CRI

500mm Tube Wall Light:
Integrated LED 8W / 500mm Ø 28mm
700lm / 2350K / 90+CRI

PRODUCT SPECIFICATIONS

1000mm Tube Wall Light:
Input voltage: 120V / 240V
Maximum wattage: 13W
120V / 240V dimmable LED Triac or 0/10V
Product weight: 7kg
IP 20 Indoor use only
(suitable for bathroom Zone 3)

500mm Tube Wall Light:
Input voltage: 120V / 240V
Maximum wattage: 8W
120V / 240V dimmable LED Triac or 0/10V
Product weight: 3kg
IP 20 Indoor use only
(suitable for bathroom Zone 3)

120V version supplied with paintable junction
box cover.

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

Satin Brass: Use a Scotch Brite pad and gently rub the pad in the direction of the grain. Repeat until the natural patina is removed. On rubbing the Scotch Brite to the brass, grains will occur. The colour of the product will temporarily get lighter until it re-oxidises.

Plated Finish: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth and gently go over marks until clean. The brass patina is achieved through an artisanal technique of applying pigments by hand during a hot patination process. Through this alchemic process, the brass is transformed whilst retaining the material's inherent qualities. It will mature and change overtime. The manner and speed in which it will change will depend on the environment, handling and the level and frequency of maintenance. Verdigris can also appear when the copper in the brass begins to oxidise.

Opaline Glass: Remove the opaline glass from the product. Using a lightly damp cloth, clean only the outside of the sphere. Only put the glass sphere back on the product once it is fully dry.